


Precise Printing Film

11Y 25 μ m

Technical Data

Structure

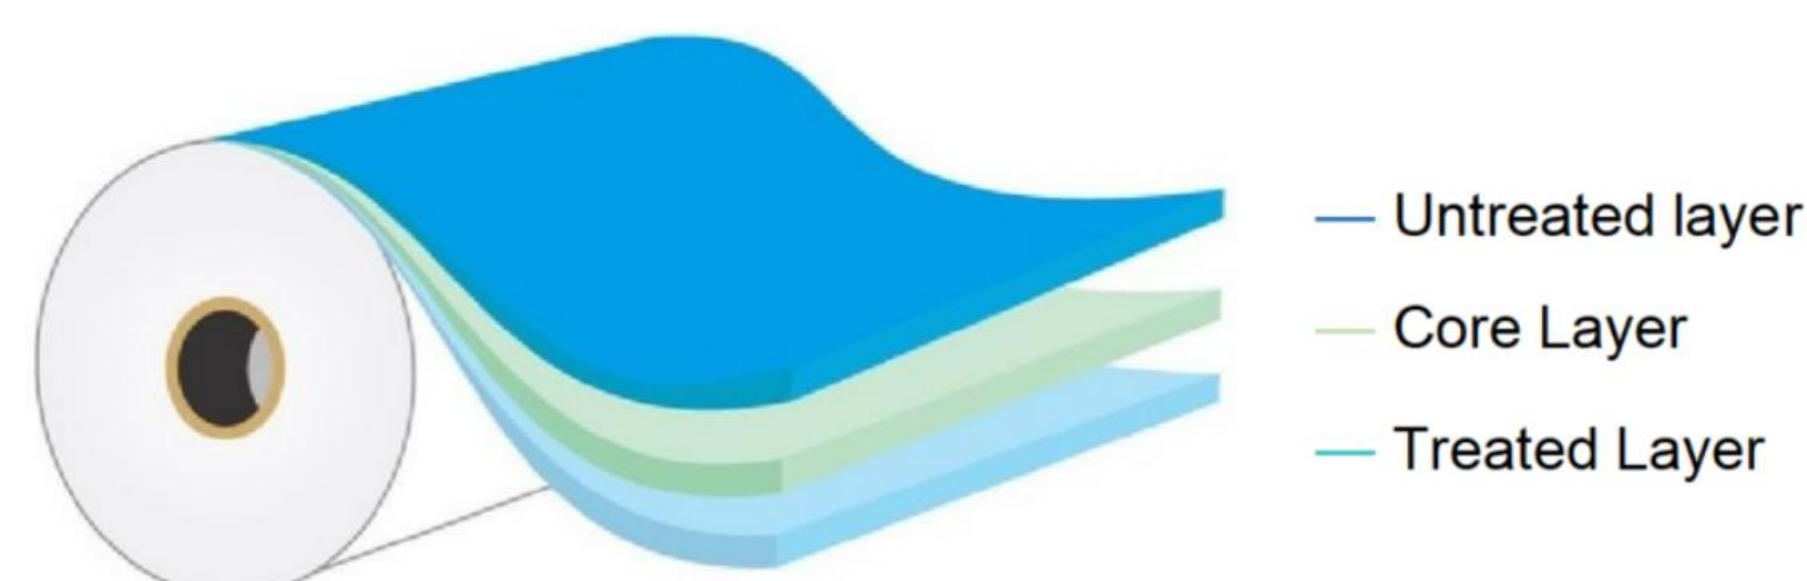

Description

Transparent non-heat sealable film with high clarity and minimal crystal defects; inner side corona treated with surface energy ≥ 38 dyn/cm for enhanced printability and adhesion.

Application

Suitable for customer-specific full-area or screen printing (e.g., portraits, gradients), followed by lamination with other substrates for bag manufacturing.

Properties	Ref.	Units	ASTM #/ Test Method	11Y			
Physical Data							
Average Thickness		micron	D-374-C	18	20	25	30
		gauge		71	79	98	118
		mils		0.7	0.8	1.0	1.2
Thickness Variation		%(\pm)		3			
Density		g/cc		0.905			
Average Substance		g/m		16.3	18.1	22.6	27.2
Surface tension(min)		dynes/cm	D-2578	≥ 38			
Kinetic COF	UT-UT		D-1894	0.20-0.30			
Yield		m ² /Kg	D-4321	61.4	55.2	44.2	36.8
		in ² /lb	D-4321	43160	38844	31075	25896
Optical Data							
Gloss(45)		gardner	D-2457	≥ 95			
Haze		%	D-1003	≤ 1.3			
Mechanical Data							
Tensile Strength	MD	kg/cm	D-882	120-160			
	TD			230-320			
Elongation at break	MD	%	D-882	140-180			
	TD			50-65			
Thermal Data							
Shrinkage (120°C/248F,5 min.)	MD	%	D-1204	2.0-4.0			
	TD			1.0-2.0			
HotTack Strength		g/15mm	@125°C @257°F	330			
Barrier Data							
MVTR(38°C,90%RH)		g/(m ² ·day)	F-1249	4.0~5.4		2.5~4.0	
MVTR(10B,90%RH)		g/100i/day		0.26~0.35		0.16~0.26	

The values given in the above table are typical performance data for reference only.
If you have special requirements for product performance indexes, please communicate with business manager.

FOROP Advanced Materials Co., Ltd.

Address: No.166 Fuju Road, Yinxi Street, Fuqing City, Fuzhou City, Fujian Province, China

Email: sales@sino-forop.com | https://sales.forop.com