


Bag-making Film

14P 25 μ m

Technical Data

Structure

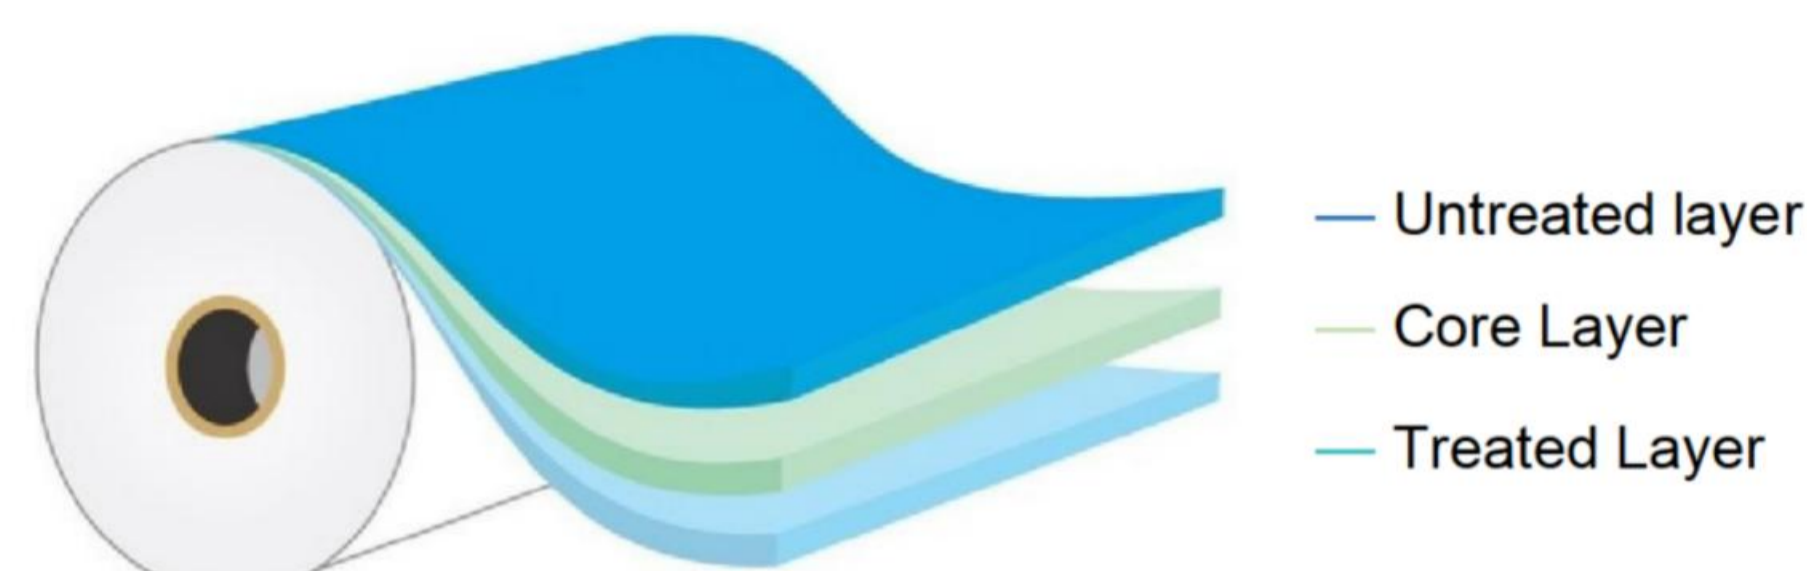

Description

Transparent non-heat sealable BOPP film with inner-side corona treatment, offering excellent slip and easy-opening performance.

Application

Designed for mono-layer bag production via heat cutting, compatible with up to 4-color printing; not recommended for full-area printing.

Properties	Ref.	Units	ASTM #/ Test Method	14P				
Physical Data								
Average Thickness		micron	D-374-C	18	20	25	30	40
		gauge		71	79	98	118	157
		mils		0.7	0.8	1.0	1.2	1.6
Thickness Variation		%(\pm)		3				
Density		g/cc		0.905				
Average Substance		g/m		16.3	18.1	22.6	27.2	36.2
Surface tension(min)		dynes/cm	D-2578	≥ 38				
Kinetic COF	UT-UT		D-1894	0.20-0.30				
Yield		m ² /Kg	D-4321	61.4	55.2	44.2	36.8	27.6
		in ² /lb	D-4321	43160	38844	31075	25896	19422
Optical Data								
Gloss(45)		gardner	D-2457	≥ 90				
		%		≤ 2.0				
Mechanical Data								
Tensile Strength	MD	kg/cm	D-882	120-160				
	TD			230-320				
Elongation at break	MD	%	D-882	140-180				
	TD			50-65				
Thermal Data								
Shrinkage (120°C/248F,5 min.)	MD	%	D-1204	2.5-4.0				
	TD			0.5-2.0				
HotTack Strength		g/15mm	@125°C @257°F	330				
Barrier Data								
MVTR(38°C,90%RH)		g/(m ² ·day)	F-1249	4.0~5.4	2.5~4.0	1.5~2.6		
MVTR(10B,90%RH)		g/100i/day		0.26~0.35	0.16~0.26	0.10~0.17		

The values given in the above table are typical performance data for reference only.
If you have special requirements for product performance indexes, please communicate with business manager.

FOROP Advanced Materials Co., Ltd.

Address: No.166 Fuju Road, Yinxi Street, Fuqing City, Fuzhou City, Fujian Province, China
Email: sales@sino-forop.com | <https://sales.forop.com>

Update date:08/25